


transversal filter receives the signal in the amplification path and, under control by the control coefficient, provides a modified signal. A combiner is provided for combining the modified signal with the signal in said amplification path so as to reduce the effect of the feedback.

Respectfully submitted,

Date:

4 April '01

By:

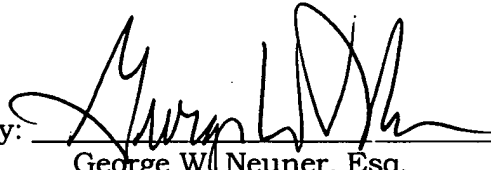

George W. Neuner, Esq.
(Reg. No. 26,964)

Dike, Bronstein, Roberts & Cushman
Intellectual Property Practice Group
EDWARDS & ANGELL, LLP
130 Water Street
Boston, MA 02109
(617) 523-3400